Tornado Performance

Tornado spiral 8W WW E14 1BC

High performance energy-saving lamp. This lamp is the best combination of high energy efficiency and extra compact size. Additional advantage of it is very long life time.

PHILIPS

sense and simplicity

Tornado Performance

Product data

• General Characteristics

Cap-Base	E14
Rated Lifetime (hours)	12000 hr

• Light Technical Characteristics

Color Code	827 [CCT of 2700K]
Color Rendering Index	81 (min) Ra8
Color Designation (text)	Warm White
Color Temperature	2700 K
Chromaticity Coordinate X	463 -
Chromaticity Coordinate Y	420 -
Luminous Efficacy Lamp	62 Lm/W
Lumen Maintenance 2000h	85 %
Lumen Maintenance 5000h	75 %
Rated Luminous Flux	510 Lm
LLMF - end nominal lifetime	65 (min) %

• Electrical Characteristics

Lamp Wattage	8 W
Power Factor	0.6 -
Voltage	220-240 V
Lamp Current mA	60 mA
Line Frequency	50/60 Hz
Dimmable	No
Wattage Equivalent	45 W
Starting Time	2 s
Warm-up Time to 60% Light Outp	5 (min), 30 (max) s

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.5 mg

• Measuring Conditions

Switching cycle	6000X

• Product Dimensions

Overall Length C	96.5 (max) mm
Diameter D	47.5 (max) mm
Width F	40.5 (max) mm

• Product Data

Order code	929689351302
Full product code	929689351302
Full product name	Tornado spiral 8W WW E14 1BC
Order product name	Tornado spiral 8W WW E14 1BC/6
Pieces per pack	1
Packing configuration	6
Packs per outerbox	6
Bar code on pack - EAN1	8718291121992
Bar code on outerbox - EAN3	8718291122005
Logistic code(s) - 12NC	929689351302
Net weight per piece	48.000 gr

Dimensional drawing

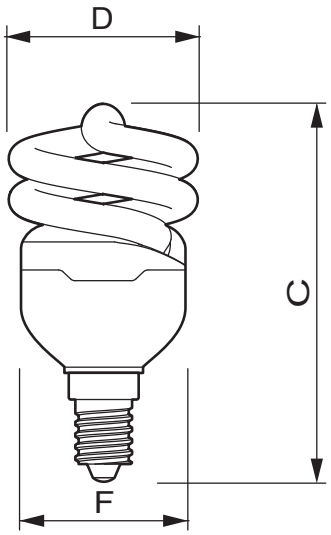

8W, E14

Product	C (Max)	D (Max)	F (Max)
QSPIR-F 8W/827 E14 220-240V 50/60Hz	96.5	47.5	40.5

Dimensional drawing



E14

© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.